

# PNEUMATIC SEED PLANTER

Electric or mechanical drive




70 YEARS OF KNOW-HOW...



... BY YOUR SIDE

*Sowing is an investment, an essential step that brings the crop to its full potential. In more than 50 countries around the world, many farmers have chosen to rely on Monosem technology. Our 70 years of shared history bear witness to this. This trust, based on notions of reliability, sustainability, and agronomic performance, is now strengthened by technological innovations. Whether on seed planters or hoeing machines, intelligence is at the heart of Monosem equipment. Our relationship is based on 4 fundamental pillars: ultimate versatility, uncompromising quality of emergence, intelligence in favour of eco-responsibility and a service worthy of the challenge.*

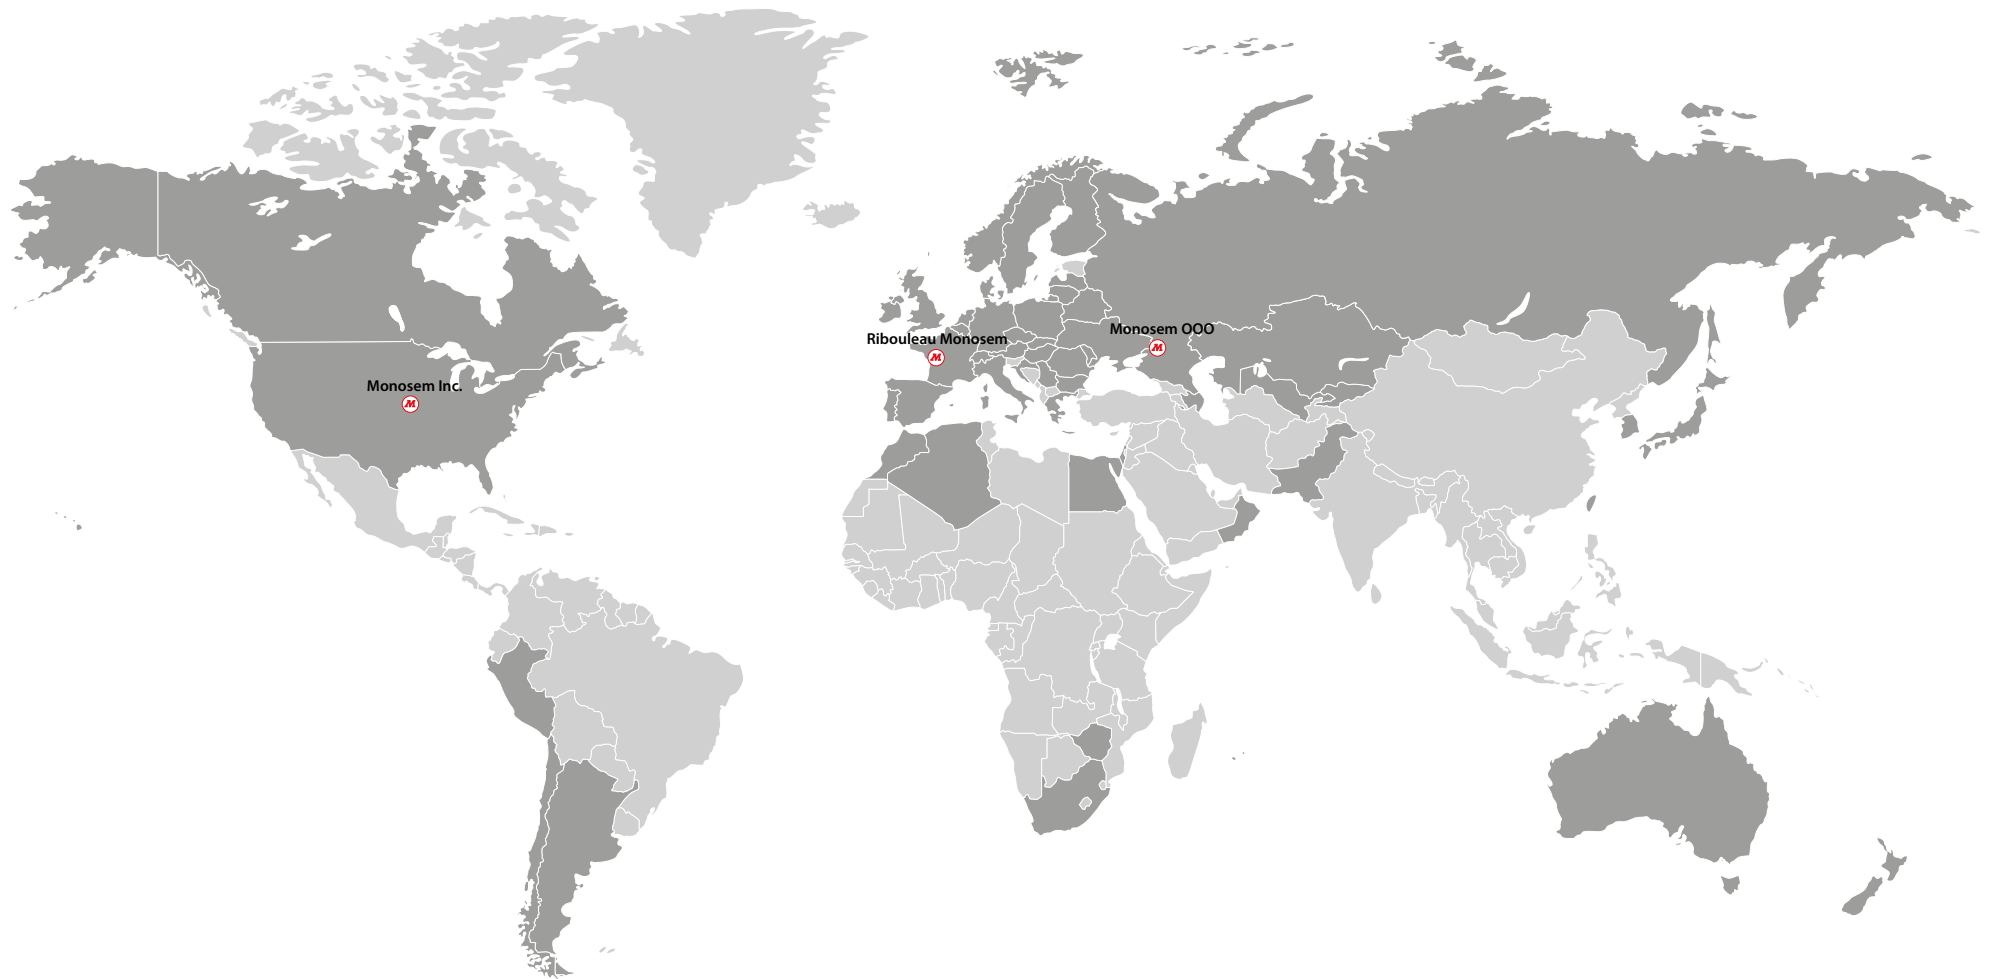









## VERSATILITY

---

*Intrinsically linked to agri-environmental conditions, farms must be agile in their production systems. We offer the ultimate versatility.*



70

Sow over 70 different crops  
with the same seed planter!

*A simple disc change is all you need.*

### Ultimate versatility

*Monosem's versatility serves to diversify your income, protect biodiversity, and conserve your soil capital. We therefore offer sowing units with a uniquely versatile distributor box. From oilseed rape to beans, peanuts, or maize, simply choose the right disc for the crop. With just one seed planter and quick adjustments, you can sow more than 70 different crops. This versatility turns the constraint of crop rotations into an economic opportunity.*







### **Adaptability in any situation**

*Because each type of soil requires its own preparation, our sowing units can be adapted. Direct seeding, simplified or conventional, on heavy or light soils, experience speaks for itself! We provide the right accessories for every context.*









## EMERGENCE

---

*If yield is the primary objective of a seeding operation, then it is the quality of emergence that we should aim for. Put all the advantages on your side and reach the full potential of your crops from the start.*



21%

Delays in emergence can have an impact of up to 21% on the final yield.

*(M. Jeschke, "Corn stand evaluation and replant considerations", 2021, Carter and al., 1989)*

### Uncompromising emergence quality

While optimum yield is the objective of the sowing operation, it is the quality of emergence that we are looking for first. The speed and uniformity of emergence are strongly influenced by the sowing conditions. Sowing at an even depth and ensuring a uniform distance between seeds is a guarantee of the best sowing conditions. This is how Monosem seed planters stand out, with mechanical kinematics that allow for unparalleled seed pressing and furrow closure.

Over the years, our recommendations for use, setting, and speed have proven their effectiveness in achieving excellent emergence quality.













## INTELLIGENCE

---

*Times are changing and so are farming practices. At the heart of our daily lives, digital intelligence supports you at every step for ever greater precision.*



## INTELLIGENCE SUPPORTING ECO-RESPONSIBILITY

*In the global context of soil preservation and the implementation of increasingly virtuous cultivation practices, the Monosem teams are working to offer solutions that reconcile productivity, simplicity, and sustainability. This intelligence, at the service of both user and environment, is materialised by the automation of tramlining, Section Control and dosage modulation.*

---



## SMART MACHINES

*A machine that manages the sowing for you, a machine for the future.  
Our smart technologies help you save on inputs with peace of mind.*



### Section Control

*Our sowing units are independently driven. The ISOBUS Section Control function allows the rows to be cut automatically. This avoids overlapping at the end of the field and sowing in the corners becomes very easy! Without overlapping, hoeing is simplified, and the risk of lodging is limited. Save on seeds and fertilizer!*



### Variable Rate

*Automatically and continuously adjust the inputs according to the position of the seed planter in the plot. Sowing density, fertilization and microgranules are managed automatically from the recommendation chart and adjusted according to the potential of the plot. Communication between your tractor and the machine is easy with the full ISOBUS compatibility of all our electric seed planters.*



### Tramlining

*Our equipment make tramining easier! At sowing time, some elements can be cut automatically to make a simple and precise marking to leave the way for the sprayer. Simple settings guarantee unprecedented seed savings, precision and working comfort.*









## SERVICE

---

*To ensure the longevity of your equipment and to enable you to maintain an unparalleled quality of sowing, we make your satisfaction our priority. Spare parts, reactivity and support are available.*





## Reliable and close to you

*Providing advice tailored to the needs of your operation is one of the outstanding qualities of our extensive distribution network. At your disposal to respond effectively to technical and operational requirements, we place our expertise at your service.*

*Because for more than 70 years you have placed your trust in us, we have created the Value & Tech Centre. This free service, from a team of technical experts, offers proactive listening and support, for serene sowing.*

## Spare parts: action, reaction!

*Checking the wear and tear of your equipment is one of the most important steps in preparing for sowing. To maintain optimum performance from your Monosem seed planter, we offer a wide range of spare parts. From distribution discs to belts and various rivets, we have the part you need!*

*Because you pay attention to the wear and tear of your parts, we put all our reactivity to good use to ensure their availability within the dealer network and from our large factory stock.*

*To consult our catalogue, go online to:*  
**[service.monosem.com](http://service.monosem.com)**

## Our machines stand the test of time

*We make a point of using quality materials in the design of our machines. A habit that has proven its effectiveness through time, and which guarantees the solidity and reliability of our machines. A lasting investment that gives you the peace of mind you need to sow in the best conditions.*

**10%**

Incorrect settings or lack of maintenance can lead to a loss of efficiency of up to 10%.

(Données Limagrain  
[Limagrain data], 2012)



## WE HAVE THE RIGHT SEED PLANTER FOR YOU

*Configure your seed planter according to your needs: choose the element, the frame, the accessories... and turn your seed planter into the ideal tool for your crops.*







## CHOOSE THE APPROPRIATE ELEMENT

*To best meet your expectations and the diversity of practices, we have developed several pneumatic elements. Robust, reliable, and easy to adjust, you will be able to sow in optimal conditions. Each element can sow a wide range of crops with excellent results.*

*NG Plus 4E, Monoshox NG Plus ME, Monoshox NX ME elements are planting discs. The planting system consists of two discs to ensure a precise opening of the furrow for quality sowing.*

*The electric seed planter will give you precision and economy thanks to a smoother communication between the seed planter and the tractor.*

*The NC element has a ploughshare. The NC Classic is easy to use and robust, while the NC Technic offers more versatility.*



## **NC: Efficiency is key**

*The NC element is used after conventional soil preparation. The simple and robust NC Classic is ideal for sowing maize or sunflowers, for example. The NC Technic is a more versatile seed planter. Its modular design offers a choice of opening options and furrow depths. It can be adapted to a wide spectrum of crops, for even greater efficiency.*





**NG Plus 4E:**  
**optimum sowing quality with flexibility**

*Whether used in conventional or simplified sowing, the NG Plus 4E is reliable and robust. Easy to use and quick to adjust for greater comfort. The depth control is intuitive and precise. It ensures precise control of the seeding depth even at shallow depths with small seeds.*

Available with  
mechanical or electric drive



**Monoshox NG Plus ME:**  
**for smooth and stable operation**

*The winning combination for quality sowing that ensures even and regular emergence at higher rates. The Monoshox suspension with shock absorbers, combined with a wide parallelogram with quick pressure adjustment, ensures better stability of the sowing unit. Its quick-release point system makes it easy to change the point.*

Available with  
mechanical or electric drive



**Monoshox NX ME:**  
**ideal for seeding in difficult conditions,  
simplified work, or direct seeding**

*Extremely versatile without compromising on precision, the Monoshox NX ME allows quality sowing in difficult conditions, simplified work, or direct sowing. Equipped with Monoshox technology, it will adapt perfectly to the ground on which it is used, to guarantee an optimal and stable sowing.*

Available with  
mechanical or electric drive



## CONNECTIVITY

*Control each element of your electric seed planter with its independent drive. Smoother communication between the seed planter and the tractor, while maintaining high reliability of information. The limited space required for the electrical installation allows for great freedom in setting the row spacing.*

*Monosem is certified by the AEF (Agricultural Industry Electronics Foundation) for its electric seed planters and front mounted fertilizers. This certification guarantees full compatibility between your tractor and our equipment, via a high-performance ISOBUS connection.*

---





## MORE COMFORT FOR MORE PRODUCTIVITY

*It is a dream to be behind the wheel of a tractor and able to control everything from a single screen. Monosem Touch terminals are 100% ISOBUS compatible to make your life easier. From the tractor cab, manage tramlining, automatic Section control, and seeding and microgranule rates to save on seeds and inputs. Also gain in comfort with our mechanical seed planters with the sowing controllers, which range from simple seed drop control to electromagnetic row break management.*

## WIDE RANGE OF FRAMES

### Rigid frame

*(Transport carriage available)*

Monobloc, Monobar or double bar, let yourself be guided. Our rigid frame can be adapted to your needs. Economical, robust and reliable, they guarantee that you can sow with confidence.



1-12  
elements



37,5-80 cm



3m-6,1m



3m-6,1m




6 - 9  
elements



35-80 cm\*



2,8m - 4,5m



3m-3,5m



6 - 9  
elements



45-80 cm



3m - 6m



3m

\* : According to models



## TFC2 frame

*Comfort or Mixed Comfort ? The first benefit from floating ends and a block of 4 mobile front wheels is ensuring perfect ground tracking while allowing folding to 3m. The second is the ability to easily slide certain sowing elements to quickly change from 12 rows to 8 rows with a simple turn of the key.*



8-16  
elements



37,5-80 cm



6m



3m

## CRT frame

*Ideal for your 12-row NG Plus and NC seed planters, our CRT frame is foldable and telescopic. Its floating and independent ends with wheel gearbox allow it to follow the ground perfectly, in all circumstances. It is perfectly suited to hilly terrain, slopes, and even small plots.*




12-13  
elements



60-80 cm



9m



3m-3,5m

## Wingfold pull-type frame

*This high-end frame will allow you to work in difficult and intensive conditions. The frame is differentiated from its counterparts by a 7-inch square steel beam. With this pull-type frame, you are guaranteed to press the soil less when sowing. Only available with NX M element.*



8  
elements




70-80 cm



3,2 m - 9,1 m



3 m - 5 m

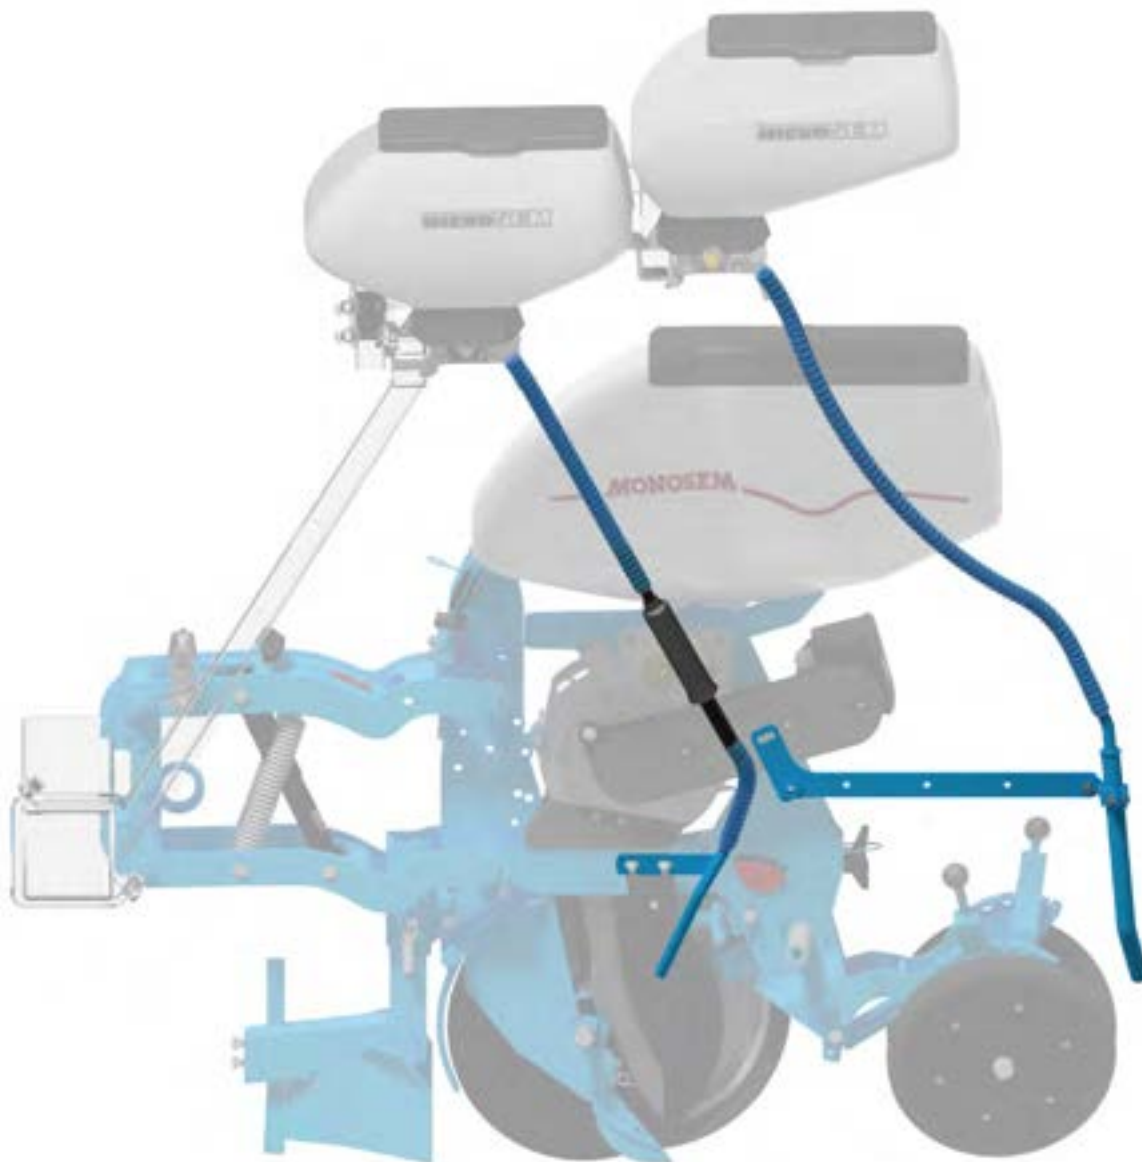

## MICROSEM: NUTRITION WITH PRECISION

*The main objective of Microsem is to protect the seed from external aggression. The distribution of microgranules requires just as much attention and precision as sowing. Our Microsem auger system ensures regular dosing of insecticide, slug pellets and even fertilizer.*

*Placed as close as possible to the seed, the microgranules will protect it from pests and provide all the nutrients necessary for uniform emergence.*

### **Choose the right chute.**

*The placement of the microgranules in the sowing line is a key factor for optimal development. Our microgranulator has two chutes depending on the product to be distributed.*

*A first chute allows an application in the sowing line; to be used if you wish to apply an insecticide (or a microgranular fertilizer).*

*The other chute, located in front or behind the press wheels, is recommended for the application of slug pellets.*





### Combined for greater efficiency

*Our microgranulators offer choice of use! They can be used alone or combined with the simultaneous application of insecticide and molluscicide, or micro-granulated starter fertilizer.*

*The electric Microsem can also be controlled from the in-cab terminal. Row breaks are thus possible for even more convenience.*

*The auger feeder ensures that the product is delivered with a high degree of uniformity for optimum seed protection. Gravity descent, for its part, limits the formation and propagation of dust.*

### Always within reach

*Because we know how valuable your time is, our intuitive application is available for free. It will guide you through the settings of the Microsem and your seed planter.*

## FERTILIZATION

*Whether it's a standard fertilizer system, a front-mounted hopper or a high-capacity hopper, we have the right solid fertilizer system for your seedbed. The auger feeder, in combination with the agitators, ensures even fertilizer dosing. Made of stainless steel, these augers are available with different pitches to provide exactly the quantity required.*



### **High-capacity on-board hoppers**

*Choose the size you need! Our high-capacity hoppers offer a wide opening and fool proof dispensing reliability.*

### **Standard on-board hoppers**

*Available in various sizes, they are mounted on rigid, telescopic frames. Electrically or mechanically driven, they ensure unequalled precision.*



## Cart Fertilizer CT 3500

*Looking for autonomy for easy fertilisation? The Cart CT 3500 is designed to be used with seed planters and hoeing machines up to 12 rows, allowing the transport of 3500L of fertilizer. No need to reload halfway through, save time with our Cart fertilizer.*



### Front hopper

*Standard or DUO, our front hoppers can be fitted to Monosem seed planters with rigid, telescopic, folding, Extend or coupled frame. For maximum versatility, the front hoppers can also be combined with one of our hoeing machines for fertiliser application during hoeing.*

*As with our entire range, the distribution can be controlled from the cab via an ISOBUS terminal.*



ALWAYS THE RIGHT ACCESSORY



### PRO wheel


Wide, large diameter (295 mm) and non-deformable, it offers quality pressing and superior seed placement. By improving the soil-seed contact, emergence is faster and more regular.

The pressing pressure is adjustable. It is combined with the pressure adjustment of the rear packing unit. Independent of the planting system and the rear packing unit, the PRO wheel follows the ground perfectly for regular pressing.



### Rotating trash wheels

Rotating trash wheels can be installed as a replacement for clod removers for sowing in the presence of plant debris.

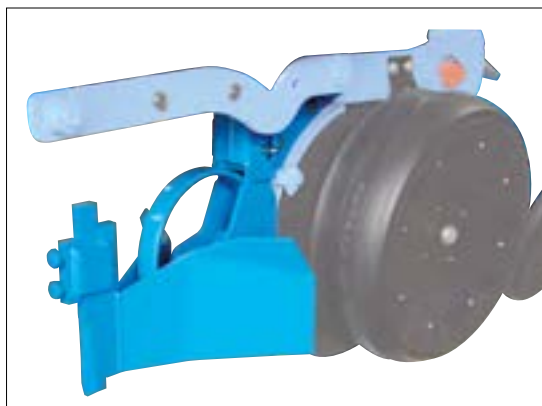

### Flexible clod remover

Clod removers on flexible supports are recommended for sowing on stony ground.



### Narrow rotating trash wheels

For sowing with small row spacings, narrow retractable trash wheels are available.



### Leading disc

Smooth or rippled, the circular plough coulter improves the opening of the furrow and creates fine soil for simplified sowing and/or in the presence of plant debris.





### **Narrow gauge wheels**

*For sowing with reduced row spacing, 5 cm narrow gauge wheels are available.*



### **Long point coulter, short ears**

*Specially designed for sowing in dry soil with small seeds.*




### **Metal press wheels with serrated discs**

*Recommended for particularly rough soils or to improve furrow closure in direct or simplified seeding.*



### **Rear block**

*Composed of two inclined wheels, it allows a good closing of the furrow.*

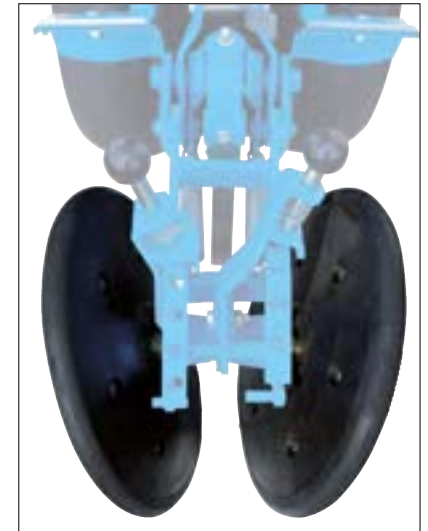

### **Narrow press wheels**

*1" wheels (instead of 2") are available as an option for better compaction on hard ground and/or simple surface conditions.*

## Technical data NC

Frame		Rigid					Coupled				Single telescopic			Folding											
		Monobar				Monobloc					Monobar	Monobloc 125	Monobloc 260	Double bar		CRT									
Width		3m		4,5m	6,1m		3m	9m		12m		4,5m	4,5m	4,5m	6m		9m								
Transporting width		3m		4,5m	6,1m		3m	3m		3m		3m	3,5m	3,5m	3m	3m	3m								
Number of elements		4	6	6	8	12	6	12	18	16	24	6	8	6	8	12	12								
Row spacing (in cm)		70-80	45/50	70-80	70-80	45/50	50	70/75	45/50	70	45	75/80	35/45/49	75/80	75/80	45/50	70/75/76,2/80								
Turbine		Power take-off drive - standard 540 rpm, optional 450 or 1,000 rpm - optional universal joint freewheel																							
Tyres		2 x (500x15)		2 x (6,5x80x15)		4 x (500x15)		2 x (6,5x80x15)		8 x (6,5x80x15)		8 x (500x15)		8 x (6,5x80x15)		8 x (500x15)		2 x (6,5x80x15)		4 x (6,5x80x15)		4 x (500x15)		4 x (6,5x80x15)	
Distance gearbox (18 speeds)		● 1		● 1		● 1		● 1		● 2		● 2		● 1		● 3		● 3 (Wheel block gearbox)							
Hydraulic markers		○	○	●	●		○	●		●		●		●		●		●							
Fertilizer	Standard	○ 2 x 175L.		○ 2 x 270L.		○ 4 x 175L.		○ 2 x 270L.		○ 4 x 270L.		○ 5 x 175L. + 1 x 270L.		-	-	○ 2 x 270L.	○ 2 x 270L.	○ 2 x 270L. or 1 x 980L.		-		-			
	Front standard	○	○	○	○	○	○	○	○	-	-	-	○	○	○	○	○	○	○	○	○	○	○		
	Front DUO	-	-	-	-	-	-	○	○	○	○	○	-	-	-	-	-	-	○	○	○	○	○		
Microsem	Insecticide	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
	Helicide	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
Hectare counter		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
Sowing controller		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
Row breaks		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
Lighting kit		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
Weight of seed planter alone		600kg	800kg	800kg	1200kg	1700kg	850kg	2800kg	3600kg	3500kg	4200kg	900kg	1200kg	1000kg	1800kg	2200kg	3000kg								

● : Standard ○ : Optional - : Impossible


For other models, configurations or drive types : 













## Technical data NG Plus 4


Frame				Rigid								Single telescopic						Double telescopic				Extend		Folding										Coupled	
												Monobar-Monobloc			Monobloc2 Comfort			Monobloc	Monobloc2 Comfort			6	6/7	Double bar				TFC floating	TFC rigid	TFC2 Comfort					
Width				3m		4,5m			6,1m		4,5m			4,5m			4,5m	4,5m			3m/4,5m	3,1m/4,5m	6m		7m	6m	6m	6m	6m				8,7m		
Transporting width <i>(with transport trolley)</i>				3m		4,5m			6,1m <i>(3m)</i>		3,5m			3,5m			3m	3m			3m	3,1m	3m		3,5m	3m	3m	3m*				<i>(3m)</i>			
Number of elements				4	5	6	6	8	9	11	8	12	6	7	8	6	7	8	6	6	7	6	7	8	9	11	12	8	8	8	9	11	12	12	18
Row spacing (in cm)				70 75 80	60	45/50	70 75 80	50/55	45/50	37,5	70 75 80	45/50	75/80	55/60	45/49	70 75 80	50 55 60	49	75/80	70/75 80	55/60 65/70	45/50 55/60 65/70 75/80	75/80 (6 rows) 55/60 (7 rows)	75/80	55/60	55/60	45/50	75/80	75/80	75/80	55 60 65	55	45/50	70 75 80	45/50
Turbine				Power take-off drive - standard 540 rpm, optional 450 or 1,000 rpm - optional hydraulic drive, optional universal joint freewheel																															
Tyres				2 x (6.5x80x15)		2 x (6.5x80x15)			4 x (6.5x80x15)		2 x (6.5x80x15)			2 x (26x12)			2 x (6.5x80x15)	2 x (26x12)	2 x (26x12)	2 x (26x12)	2 x (26x12)	4 x (6,5x80x15)				4 x (26x12)	2 x (26x12)	4 x (6.5x80x15)				8 x (6,5x80x15)	8 x (6,5x80x15)		
Drive	Mechanical	Distance gearbox	Standard (18 speeds)	● 1		● 1			● 1		● 1			-			● 1	-	-	-	● 3				● 3	-	● 3				● 2	● 2			
			Lateral (20 speeds)	-		-			-		-			● 1			-	● 1	● 1	● 1	-				-	● 1	-				-				
			EasyGear (18 speeds)	○ 1		○ 1			○ 1		○ 1			-			○ 1	-	-	-	○ 3				○ 3	-	○ 3				○ 2	○ 2			
	Electric		○		○			○		○			○			○			○	○	○	○	○				○	○	○				○	-	
Hydraulic markers				●		●			●		●			●			●	●	●	●	●				●	●	●				●	●			
Fertilizer	Standard			○ 2 x 175L.		○ 2 x 270L.	-		○ 4 x 175L.		○ 2 x 270L.	-		-			○ 2 x 270L.	-	-	-	-				-	-	-				○ 4 x 270L.	○ 5 x 175L. + 1 x 270L.			
	"High-capacity"			○ 740 or 980L.	-	○ 980 or 2 x 700L.	-		○ 2x1000L.	-	○ 980L.	-		○ 680 or 1030L.			○ 980L.	○ 680 or 1030L.	○ 1020L.	-	-				○ 1500L.	○ 1500L.	-				-	-			
	Front Standard			○		○			○		○			○			○	○	○	○	○				-	-	○				-	-			
	Front DUO			-		-			○		-			-			-	-	-	-	○				-	-	○				-	-			
Microsem	Insecticide			○		○			○		○			○			○	○	○	○	○				○	○	○				○	○			
	Helicide			○		○			○		○			○			○	○	○	○	○				○	○	○				○	○			
Hectare counter				○		○			○		○			○			○	○	○	○	○				○	○	○				○	○			
Sowing controller				○		○			○		○			○			○	○	○	○	○				○	○	○				○	○			
Row breaks				○		○			○		○			○			○	○	○	○	○				○	○	○				○	○			
Lighting kit				○		○			○		○			○			○	○	○	○	○				○	○	○				○	○			
Weight of seed planter alone				800kg	900kg	1000kg	1100kg	1300kg	1400kg	1600kg	1650kg	2050kg	1300kg	1400kg	1500kg	1450kg	1550kg	1650kg	1300kg	1450kg	1550kg	1650kg	1800kg	2200kg	2300kg	2600kg	2600kg	2800kg (with fertilizer)	2750kg (with fertilizer)	2600kg	2700kg	2900kg	3000kg	3250kg	4250kg

● : Standard ○ : Optional - : Impossible \* : According to models

For other models, configurations or drive types : 

## Technical data NG Plus M

Frame				Single telescopic					Double telescopic			Extend		Multislide			Folding																	
				Monobloc			Monobloc2 Comfort			Monobloc2 Comfort Mixed	Monobloc	Monobloc2 Comfort		6	6/7	7	8	9	Double bar				TFC Floating	TFC Rigid	TFC2 Comfort					TFC2 Comfort Mixed		CRT		
Width				4,5m			4,5m			4,5m	4,5m	4,5m	4,5m	3m/4,5m	3,1m/4,5m	2,55m/3m		3m		6m		7m	6m	6m	6m	6m					6m		9m	
Transporting width				3,5m			3,5m			3,5m	3m	3m	3m*	3m	3,1m	2,55m/3m		3m		3m		3,5m	3m	3m	3m	3m*					3m*		3m*	3,5m*
Number of elements				6	7	8	6	7	8	7	6	6	7	6	7	7	8	9	8	9	11	12	8	8	8	9	11	12	16	11	12	12	13	
Row spacing (in cm)				75/80	55/60	45/49	75/80	50/55/60	49	75 or 80 (6 rows) 56,2 or 60 (7 rows)	75/80	75/80	55/60/65/70	45/50 55/60 65/70 75/80	75/80 (6 rows) 55/60 (7 rows)				75/80	60	60	45/50	75/80	75/80	75/80	55/60/65	55	45/50	37,5	75 or 80 (8 rows) 55 (11 rows)	75 or 80 (8 rows) 45 or 50 (12 rows)	70/75/80	60	
Turbine				Power take-off drive - standard 540 rpm, optional 450 or 1,000 rpm- Optional hydraulic drive, optional universal joint freewheel																														
Tyres				2 x (6.5x80x15)			2 x (26x12)			2 x (26 x 12)	2 x (6.5x80x15)	2 x (26x12)	2 x (26x12)	2 x (26x12)	2 x (23 x 10.5) 2 x (26 x 12)		4 x (6.5x80x15)				4 x (26x12)	2 x (26x12)	4 x (26x12)					4 x (26x12)		4 x (6.5x80x15)				
Drive	Mechanical	Distance gearbox	Standard	○ 1			-			-	○ 1	-		-	-	-		○ 3				○ 3	-	○ 3					○ 3		-			
			Lateral	-			● 1			● 1	-	● 1	● 1	● 1	-		-				-	● 1	-					-		-				
			EasyGear	● 1			-			-	● 1	-		-	-	● 3		● 3				● 3	-	● 3					● 3		● 3			
	Electric		○			○			○	○			○	○	●		○						○						○	○				
Hydraulic markers				●			●			●	●	●		●	●	●		●				●	●	●					●		●			
Fertilizer	Standard		○ 2 x 270L.	-		-		-		○ 2 x 270L.	-		-	-			-				-	-	-					-		-				
	“High-capacity”		○ 980L.	-		○ 1 x 680L. or 1 x 1030L.		○ 1 x 680L. or 1 x 1030L.		○ 980L.	1 x 680L. or 1 x 1030L.		○ 1020L.	-			-				○ 1500L.	○ 1500L.	○ 1350L.	-					-		-			
	Front standard		○	-		○		○		○	○		○	○			○				-	-	○					○		○	-			
	Front DUO		-		-		-		-		-	-		-	-		○				-	-	○					○		○	-			
Microsem	Insecticide		○		○		○		○	○	○	○	○	○	○		○				○	○	○					○		○				
	Helicide		○		○		○		○	○	○	○	○	○	○		○				○	○	○					○		○				
Hectare counter				○			○			○	○	○	○	○	○		○				○	○	○					○		○				
Sowing controllers				○			○			○	○	○	○	○	○		○				○	○	○					○		○				
Row breaks				○			○			○	○	○	○	○	○		○				○	○	○					○		○				
Lighting kit				○			○			○	○	○	○	○	○		○				○	○	○					○		○				
Weight of seed planter alone				1300kg	1425kg	1550kg	1500kg	1625kg	1750kg	1625kg	1350kg	1550kg	1675kg	1700kg	1850kg	1981kg	2081kg	2337kg	2250kg	2350kg	2600kg	2550kg	2900kg (with fertilizer)	2850kg (with fertilizer)	2700kg	2800kg	3000kg	3100kg	3500kg	3050kg	3150kg	3500kg	3500kg	

● : Standard    - : Impossible     : consult us  
○ : Optional    \* : According to models

For other models, configurations or drive types : 



## Technical data NX M


Frame				7" TOP Mounted frames					7" TOP Pull-type frames							
				Rigid				Folding	Rigid			Folding				
Width				3,2m	4,7m	6,3m	9,2m	6,3m	3,2m	5,1m	6,7m	4,5m	4,5m	6m	6,8m	9,2m
Transporting width				3,2m	4,7m	6,3m	9,2m	3,5m	3,2m	5,1m	6,7m	3m	3,4m	3m	3,4m	5m
Number of elements				4	6	8	12	8	4	6	8	6	6	8	8	12
Row spacing (in cm)				70 -75 - 76,2 - 80				75 - 76,2 - 80	70 -75 - 76,2 - 80			70-75	80 <sup>(1)</sup>	70-75	80	70
Turbine				Power take-off drive - standard 540 rpm, optional 450 or 1,000 rpm Optional hydraulic drive, optional universal joint freewheel					Power take-off drive - standard 540 rpm, optional 450 or 1,000 rpm Wide angle universal joint, optional hydraulic drive, optional universal joint freewheel							
Tyres				2 x (6.5x15)	2 (or 4) x (6.5x16)	2 (or 4) x (6.5x16)	4 x (6.5x16)	4 x (6.5x16)	2 x (7.5x20)	4 x (7.5x20)	4 x (7.5x20)	2 x (265/70R19,5)		2 x (265/70R19,5)	2 x (265/70R19,5)	6 x (7.5x20)
Drive	Mechanical	Distance gearbox	Standard (20 speeds)	1	1	1	1	3	1	1	1	-	-	-	-	1
			Lever-operated (18 speeds)	-	-	-	-	-	-	-	-	1	1	1	1	-
	Electric			○	○	○	○	○	○	○	○	○	○	○	○	○
Hydraulic markers				●	●	●	●	●	●	●	●	●	●	●	●	●
Fertilizer	Standard			-	-	-	-	-	-	-	-	-	-	-	-	○ 4 x 270L
	“High-capacity”			○ 2 x 400L	○ 2 x 700L	○ 2 x 1000L	-	-	○ 2 x 400L	○ 2 x 700L	○ 2 x 1000L	○ 1 x 1030L	○ 1 x 1030L	○ 1 x 1500L (or 1350L.)*	○ 1 x 1500L (or 1350L.)*	-
	Front standard			○	○	○	-	○	-	-	-	-	-	-	-	-
	Front DUO			○	○	○	○	○	-	-	-	-	-	-	-	-
Microsem	Insecticide			○	○	○	○	○	○	○	○	○	○	○	○	○
	Helicide			○	○	○	○	○	○	○	○	○	○	○	○	○
Hectare counter				○	○	○	○	○	○	○	○	○	○	○	○	○
Sowing controller				○	○	○	○	○	○	○	○	○	○	○	○	○
Lighting kit				○	○	○	○	○	○	○	○	●	●	●	●	○
Weight of seed planter alone (with fertilizer)				1260kg (1580kg)	1680kg (2140kg)	2150kg (2910kg)	3350kg (-)	3000kg (-)	1660kg (1960kg)	2430kg (2820kg)	3030kg (3660kg)	2500kg (2900kg)	2550kg (2950kg)	3100kg (3650kg)	3150kg (3700kg)	4250kg (5050kg)

● : Standard

○ : Optional

- : Impossible

\* : According to models

(1) : Inter row spacing 80cm : 

For other models, configurations or drive types : 

**MONOSEN**  
Enhanced precision









15 rue Beaujon • 75008 PARIS • France  
+335 49 81 50 00



Siren : 303953566 • R.C.S. Paris

Reference : 92300EN - 07/21

[www.monosem.com](http://www.monosem.com)

*All the data concerning the equipment, the general appearance, the weight and dimensions are current at the date of printing and vary according to countries. They may be modified without previous notice. This brochure cannot be considered as a binding document. Your Monosem partner will not hesitate in informing you of any possible changes. In order to illustrate this brochure, certain safety housings and mechanisms may have been removed. Apart from this particular case and complying with the recommendations in the manual, these must remain fitted.*  
Printing : Prouteau Imprimerie Bressuire • Graphic design, layout and photo credits : Monosem.

