


Technical sheet :

AGRICULTURAL BUCKET

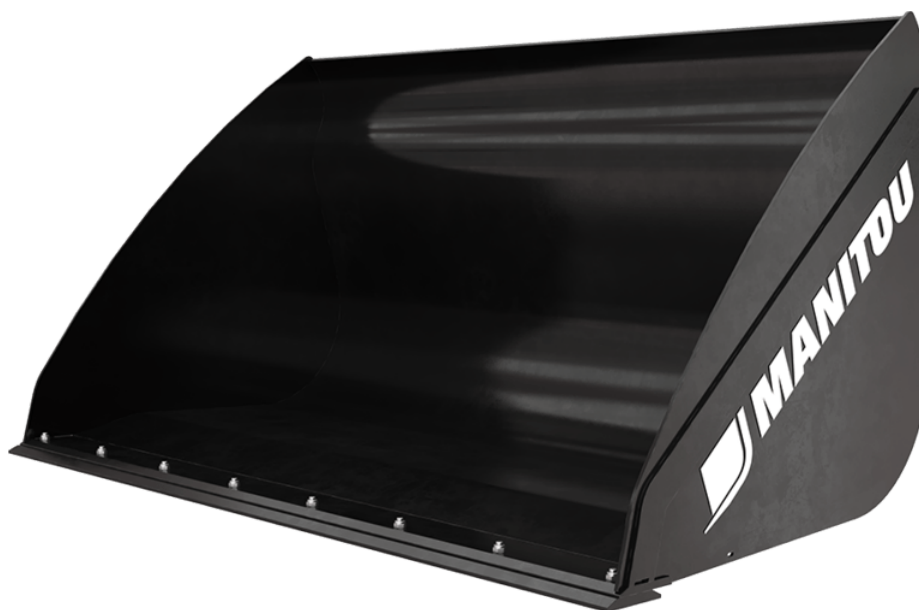



Benefits

- Daily use and hard working bucket.
- Ideal bucket for bulk products (cereals, woodchip, mineral feed etc.).
- Durable and resistant bucket.
- Improved shape designed for quick loading and unloading operation.
- More longevity of the wear plate.

Technical characteristics

- Wide range of bucket capacity from 1500 L to 3000 L.
- Light material bucket suitable for handling materials with a density ≤ 1 .
- Reinforced structure (base, blade and sides).
- "DA" = tip angle increased of 10°.
- Optional: 500 HB reversible wear plate.
- Note: road circulation kit mandatory in Italy. Contact your dealer.
- MRT: only for deconstruction applications. MRTs are not designed for intensive loading applications.

Agricultural Bucket - Dimensional drawing

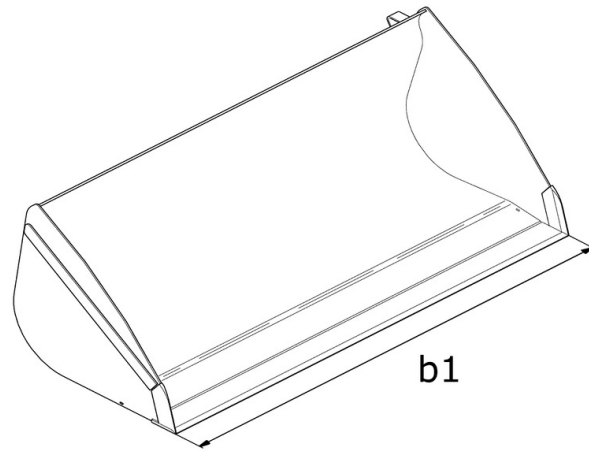

Capacities		CBA 900 / 1500	CBA 1500 / 2050	CBA 1500 / 2050 DA	CBA 1500 / 2450	CBA 1700L / 2100	CBA 2000 / 2450	CBA 2000L / 2250	CBA 2500L / 2450	CBA 3000 / 2500	CBA 4000 / 2500 LDR
Heaped Capacity (l)		886	1500	1500	1529	1703	2010	1970	2526	3023	4078
Struck capacity (l)		672	1101	1101	1101	1271	1484	1456	1916	2342	3147
Weight and dimensions											
Overall height (mm)	h17	1029	1119	1119	997	1150	1150	1104	1250	1314	1527
Width (mm)		1500	2050	2050	2450	2100	2450	2250	2450	2500	2500
Length (mm)		1154	1147	1147	1170	1190	1204	1422	1497	1733	2075
Overall weight (kg)		367	490	482	500	512	557	585	682	753	1035
Working Parameters											
Machine Equipement		×	×	×	×	×	×	×	×	×	×
Other Data for Attachments											
Bolted wearplate (LDR)		-	-	Not Standard	Not Standard	Not Standard	Not Standard	Not Standard	-	-	-
Wear plate hardness		-	-	-	500	-	500	500	-	-	-

Machines compatibility	CBA 900 / 1500	CBA 1500 / 2050	CBA 1500 / 2050 DA	CBA 1500 / 2450	CBA 1700L / 2100	CBA 2000 / 2450	CBA 2000L / 2250	CBA 2500L / 2450	CBA 3000 / 2500	CBA 4000 / 2500 LDR
Reference number	570543	570546	653035	570547	570549	570551	790540	570553	570555	-
Reference number with bolted wearplate (WP)	-	-	52000489	570548	52610570	570552	790541	570554	500701	-
Skid Steer Camage reference	52658300	-	-	-	-	-	-	-	-	-
MLA-T 533-145 V+ - ST5	-	-	-	X	-	X	X	-	-	-
MLT 420-60 H	X	-	-	-	-	-	-	-	-	-
MLT 625-75 H	-	X	X	-	-	-	-	-	-	-
MLT 630-115	-	-	-	-	-	X	-	-	-	-
MLT 630-115 V	-	-	-	-	-	X	-	-	-	-
MLT 630-115 V CP	-	-	-	-	-	X	-	-	-	-
MLT 635-130 PS+	-	-	-	X	-	X	-	X	-	-
MLT 635-140 V+	-	-	-	X	-	X	-	X	-	-
MLT 730-115 V	-	-	-	-	-	X	-	-	-	-
MLT 730-115 V CP	-	-	-	-	-	X	-	-	-	-
MLT 733-115	-	-	-	X	-	X	-	-	-	-
MLT 733-115 LSU	-	-	-	X	-	X	-	-	-	-
MLT 737-130 PS+	-	-	-	X	-	X	-	-	X	-
MLT 741-130 PS+	-	-	-	X	-	X	-	-	X	-
MLT 741-140 V+	-	-	-	X	-	X	-	-	X	-
MLT 841-145 PS+	-	-	-	-	-	X	-	X	X	-
MLT 940-140 V+	-	-	-	-	-	X	-	X	X	-
MLT 1041-145 PS+L	-	-	-	-	-	X	-	X	X	-
MLT-X 625-75 H	-	X	X	-	-	-	-	-	-	-
MLT-X 732	-	-	-	X	-	X	-	-	-	-
MLT-X 735 T LSU	-	-	-	X	-	X	-	X	-	-
MLT-X 741-140 V+	-	-	-	X	-	X	-	-	X	-
MLT-X 841 - 145 PS+	-	-	-	-	-	X	-	X	X	-
MLT-X 1041-145 PS+L	-	-	-	-	-	X	-	X	X	-
MLT 630-105 ST4 OLD	-	-	-	-	X	X	X	-	-	-
MLT 630-105 V CP ST4 OLD	-	-	-	-	X	X	X	-	-	-
MLT 630-105 V ST4 OLD	-	-	-	-	X	X	X	-	-	-
MLT 635-130 PS+ ST4 OLD	-	-	-	X	-	X	-	X	-	-
MLT 730-115 V CP ST4 OLD	-	-	-	-	X	X	X	-	-	-
MLT 730-115 V ST4 OLD	-	-	-	-	X	X	X	-	-	-
MLT 733-115 LSU ST4 OLD	-	-	-	X	-	X	-	X	-	-
MLT 733-115 ST4 OLD	-	-	-	X	-	X	-	X	-	-
MLT 737-130 PS+ ST4 OLD	-	-	-	X	-	X	-	X	X	-
MLT 840-145 PS+ OLD	-	-	-	-	-	X	-	X	X	-
MLT 845-100 H OLD	-	-	-	X	-	X	-	X	X	-
MLT 845-120 OLD	-	-	-	X	-	X	-	X	X	-
MLT 1040-145 PS+ L OLD	-	-	-	-	-	X	-	X	X	-
MLT-X 840-140 PS+ OLD	-	-	-	-	-	X	-	X	X	-
MLT-X 845-120 OLD	-	-	-	X	-	X	-	X	X	-
MLT-X 845-120 H OLD	-	-	-	X	-	X	-	X	X	-
MLT-X 1040-140 PS+ L OLD	-	-	-	-	-	X	-	X	X	-
reference_number_ereco	-	-	-	-	-	-	-	-	-	-
MHT 790 ST5	-	-	-	-	-	-	-	-	-	X
MHT-X 790	-	-	-	-	-	-	-	-	-	X
MHT-X 790 ST3A	-	-	-	-	-	-	-	-	-	X
MHT 790 OLD	-	-	-	-	-	-	-	-	-	X

TABLE SYMBOL

	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition



Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes