


**AL 530**

**AL/ALT**



**GEHL®**

Capacities		Metrisch	US-System
Static tipping load with bucket (straight)		1880 kg	4145 lb
Static tipping load with bucket (full turn)		1650 kg	3638 lb
Static tipping load with forks (straight)		1472 kg	3245 lb
Static tipping load with forks (full turn)		1292 kg	2848 lb
Max. height of bucket pivot point	h35	3.07 m	10 ft 1 in
Max. lifting height (below forks)	h3	3.87 m	12 ft 8 in
Max. outreach		0.48 m	1 ft 7 in
Reach at max. height		0.45 m	1 ft 6 in
Bucket hinge pin height (extended)		0.46 m	1 ft 6 in
Weight and dimensions			
Unladen weight (with forks) with 4-post canopy		2678 kg	5904 lb
Overall chassis length (without hitch)	l14	3.79 m	12 ft 5 in
Wheelbase	y	1.77 m	5 ft 10 in
Overall cab width	b4	1 m	3 ft 3 in
Overall height with FOPS removed and ROPS folded	h36	2.29 m	7 ft 6 in
Overall height with 4 posts canopy	h38	2.29 m	7 ft 6 in
Overall height with cab	h17	2.29 m	7 ft 6 in
Dump reach - Full height	r6	0.46 m	1 ft 6 in
Overall Operating Height - Fully Raised	h27	3.87 m	12 ft 8 in
Tilt-up angle	a4	50 °	50 °
Tilt-down angle	a5	47 °	47 °
External turning radius (over tyres)	Wa1	3.36 m	11 ft
Articulation angle	a19	45 °	45 °
Overall length with bucket	l16	4.49 m	14 ft 9 in
Overall width less bucket	b1	1.33 m	4 ft 4 in
Overall length - Less Bucket	l2	3.79 m	12 ft 5 in
Rear overhang	c6	1.15 m	3 ft 9 in
Dump angle - Fully raised	a5	47 °	47 °
Dump Height - Fully Raised	h29	2.30 m	7 ft 7 in
Maximum Rollback Angle - Fully Raised	a4	46 °	46 °
Maximum Rollback Angle at Ground	a13	50 °	50 °
Digging Position	h32	-72 mm	-3 in
Ground clearance	m4	360 mm	14 in
Clearance Radius - Front with Bucket	b18	3.36 m	11 ft
Bucket Width	e1	1.52 m	5 ft
Front Wheel Center to Pivot Pin	m3	0.73 m	2 ft 5 in
Height to Hinge Pin - Fully Raised	h28	3.07 m	10 ft 1 in
Engine			
Engine brand		Perkins	Perkins
Engine model		403J-E17T	403J-E17T
Number of cylinders		3	3
Power (kW)		36 kW	36 kW
Max. torque / Engine rotation		166 Nm / 1600 rpm	166 Nm / 1600 rpm
Engine cooling system		Water	Water
Transmission			
Transmission type		Hydrostatic	Hydrostatic
Number of gears (forward / reverse)		2 / 2	2 / 2
Max. travel speed (may vary according to applicable regulations)		20 km/h	12 mi/h
Hydraulics			
Hydraulic pump type		Gear pump	Gear pump
Hydraulic flow - Pressure		60 l/min / 207 Bar	60 l/min / 3002 PSI
High-Flow Option (l/min)		60 l/min	60 l/min
Drive hydraulic system pressure		207 Bar	3002 PSI
Tank capacities			
Hydraulic oil		50 l	13 US gal
Fuel tank		65 l	17 US gal

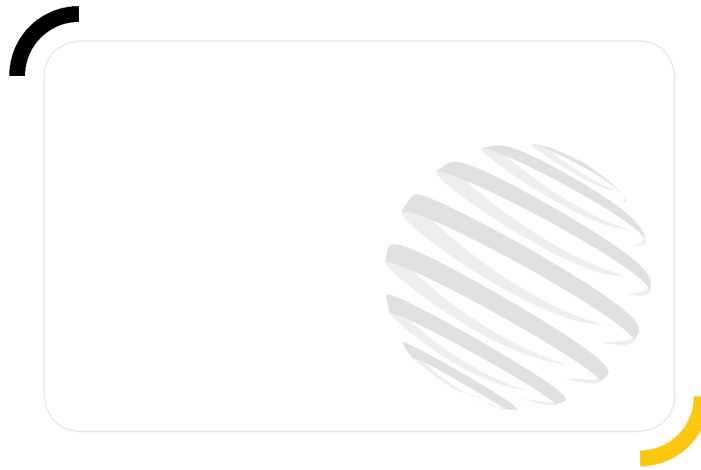

# GEHL®

Siège Social  
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095  
Tel: (262) 334-9461 - Fax: (262) 338-7517  
[www.gehl.com](http://www.gehl.com)



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend