

Technical sheet :

HIGH CAPACITY AGRICULTURAL GRAB BUCKET



Benefits

- Robust and versatile bucket suitable for massive agricultural applications.
- THE grab bucket for maximum work output.
- High resistance steel.
- Reinforced bucket for a massive work output in agricultural applications.
- Ideal to handle cereals and other bulk materials.

Technical characteristics

- Welded teeth - MS.
- Handling materials with a density ≤ 1000 kg/m³.
- 500HB bolt-on cutting edge in standard.
- Reinforced bucket: improved material grip on sides & top Increased struck capacity (1500 L).









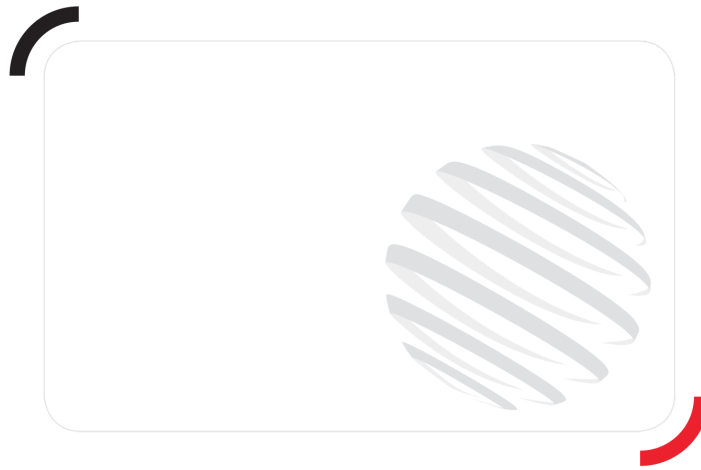
Capacities		CBG 2480 / 2000 MS	CBG 2480 / 2600 MS
Heaped Capacity (l)		2000	2600
Struck capacity (l)		1500	1500
Weight and dimensions			
Opened grab height (mm)	h34	2292	2452
Closed grab height (mm)	h33	1502	1502
Width (mm)		2480	2480
Length (mm)		1491	1670
Overall weight (kg)		1225	1357
Working Parameters			
Machine Equipment			
Teeth / Fingers		6 / 6	7 / 7
Fork spread minimum (mm)	b5	453	362
Fork spread maximum (mm)	b5	453	362
Other Data for Attachments			
Bolted wearplate (LDR)		Standard	Standard
Wear plate hardness		500	500
Machines compatibility		CBG 2480 / 2000 MS	CBG 2480 / 2600 MS
Reference number		790656	790658
MLT 840-145 PS+		X	-
MLT 841-145 PS+		X	-
MLT 845-100 H		X	-
MLT 845-120		X	-
MLT 961-145 V+ L		-	X
MLT 961-160 V+ L		-	X
MLT 1040-145 PS+ L		X	-
MLT 1041-145 PS+L		X	-
MLFX 840-140 PS+		X	-
MLFX 841 - 145 PS+		X	-
MLFX 845-120		X	-
MLFX 845-120 H		X	-
MLFX 961-145 V+ L		-	X
MLFX 961-160 V+ L		-	X
MLFX 1040-140 PS+ L		X	-
MLFX 1041-145 PS+L		X	-

TABLE SYMBOL

	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes