


Technical sheet :

# ***BALE CLAMP SUPER COMPACT***

---

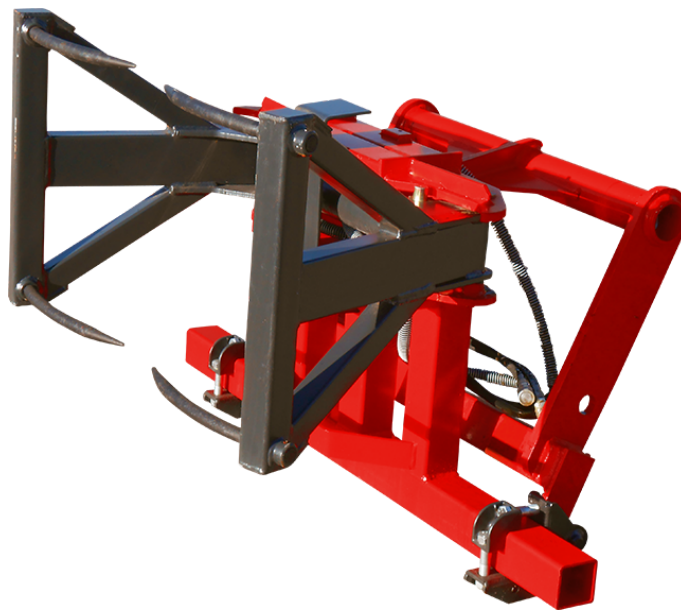

## **Benefits**

- Easy to use and durable attachment
- Very compact clamp - ideal for under roof stacking
- Rounded teeth in wrought iron that offer an accurate and clean penetration on materials.

## **Technical characteristics**

- 2x2 teeth
- Non-synchronized closure
- Capacity: 800kg
- Handles 1 round bale - Ø 1.8 m maximum
- Handles 1 rectangular bale - 1.2 m high.

| Capacities             |     | PBG 2x2                                                                           |
|------------------------|-----|-----------------------------------------------------------------------------------|
| Capacity (kg)          |     | 800                                                                               |
| Weight and dimensions  |     |                                                                                   |
| Forks length (mm)      | l   | 1000                                                                              |
| Overall height (mm)    | h17 | 3010                                                                              |
| Width (mm)             |     | 1800                                                                              |
| Length (mm)            |     | 1590                                                                              |
| Overall weight (kg)    |     | 760                                                                               |
| Arm length (mm)        |     | 500                                                                               |
| Working Parameters     |     |                                                                                   |
| Machine Equipement     |     |  |
| Teeth / Fingers        |     | 14 / 3                                                                            |
| Opening minimum (mm)   |     | 420                                                                               |
| Opening maximum (mm)   |     | 1570                                                                              |
| Machines compatibility |     | PBG 2x2                                                                           |
| Reference number       |     | 757639                                                                            |
| MLT 420-60 H           |     | X                                                                                 |
| MLT 625-75 H           |     | X                                                                                 |
| MLT 630-105 ST4        |     | X                                                                                 |
| MLT 630-105 V CP ST4   |     | X                                                                                 |
| MLT 630-105 V ST4      |     | X                                                                                 |
| MLT 630-115            |     | X                                                                                 |
| MLT 630-115 V          |     | X                                                                                 |
| MLT 630-115 V CP       |     | X                                                                                 |
| MLT 635-130 PS+        |     | X                                                                                 |
| MLT 635-140 V+         |     | X                                                                                 |
| MLT 730-115 V          |     | X                                                                                 |
| MLT 730-115 V CP       |     | X                                                                                 |
| MLT 730-115 V CP ST4   |     | X                                                                                 |
| MLT 737-130 PS+ ST4    |     | X                                                                                 |
| MLT 840-145 PS+        |     | X                                                                                 |
| MLT 841-145 PS+        |     | X                                                                                 |
| MLT 845-100 H          |     | X                                                                                 |
| MLT 845-120            |     | X                                                                                 |
| MLT 1040-145 PS+ L     |     | X                                                                                 |
| MLT 1041-145 PS+L      |     | X                                                                                 |
| MLT-X 625-75 H         |     | X                                                                                 |
| MLT-X 735 T LSU        |     | X                                                                                 |
| MLT-X 840-140 PS+      |     | X                                                                                 |
| MLT-X 841 - 145 PS+    |     | X                                                                                 |
| MLT-X 845-120          |     | X                                                                                 |
| MLT-X 845-120 H        |     | X                                                                                 |
| MLT-X 1040-140 PS+ L   |     | X                                                                                 |
| MLT-X 1041-145 PS+L    |     | X                                                                                 |

| TABLE SYMBOL                                                                        |                            |                                                                                     |                         |                                                                                       |                                               |
|-------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------|-------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------|
|  | No predisposition required |  | Hydraulic line          |  | Return piping to hydraulic oil tank           |
|  | Electric predisposition    |  | Platform predisposition |  | Tyre handler, cylinder handler predisposition |



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes