

Technical sheet :

BALE CLAMP CLASSIC





Benefits

- Easy to use and efficient attachment.
- Handles 1 round bale or 2 rectangular bales at the same time.
- Rounded teeth in wrought iron that offer an accurate and clean penetration on materials.
- Optional: 2 lower teeth (680 mm, Ø 35 mm) that ensure a perfect stability while handling rectangular bales.

Technical characteristics

- 2x4 or 2x3 teeth.
- Synchronized closure.
- Excellent lifting capacity of 1000 or 1200 kg at 800 mm.
- Handles 1 round bales Ø 1.8 m max. for the 2x4 and Ø 1.5 to 2 m for the 2x3.
- Handles 2 rectangular bales of maximum 0.8 m high per bale.

Bale clamp classic - Dimensional drawing

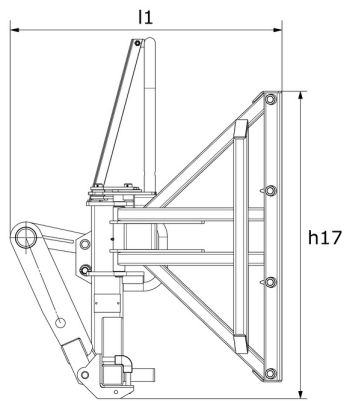

Capacities		CLBR 2x3	PBG 2x4
Capacity (kg)		1200	1000
Weight and dimensions			
Forks length (mm)	l	335	-
Overall height (mm)	h17	1382	1381
Width (mm)		1090	1300
Length (mm)		1082	1031
Overall weight (kg)		235	262
Arm length (mm)		700	600
Working Parameters			
Machine Equipement			
Hydraulic system		Yes	Yes
Teeth / Fingers		2 / 3	2 / 4
Opening minimum (mm)		186	112
Opening maximum (mm)		1960	1776
Fork spread minimum (mm)	b5	335	-
Fork spread maximum (mm)	b5	335	-
Machines compatibility		CLBR 2x3	PBG 2x4
Reference number		52001013	757612
MLA-T 533-145 V+ - ST5		X	X
MLT 420-60 H		X	X
MLT 625-75 H		X	X
MLT 630-105 ST4		X	X
MLT 630-105 V CP ST4		X	X
MLT 630-105 V ST4		X	X
MLT 630-115		X	X
MLT 630-115 V		X	X
MLT 630-115 V CP		X	X
MLT 635-130 PS+		X	X
MLT 635-140 V+		X	X
MLT 730-115 V		X	X
MLT 730-115 V CP		X	X
MLT 730-115 V CP ST4		X	X
MLT 733-115 ST4		X	X
MLT 737-130 PS+ ST4		X	X
MLT 840-145 PS+		X	X
MLT 841-145 PS+		X	X
MLT 845-100 H		X	X
MLT 845-120		X	X
MLT 940-140 V+		X	X
MLT 961-145 V+ L		X	X
MLT 961-160 V+ L		X	X
MLT 1040-145 PS+ L		X	X
MLT 1041-145 PS+L		X	X
MLT-X 625-75 H		X	X
MLT-X 732		X	X
MLT-X 735 T LSU		X	X
MLT-X 840-140 PS+		X	X
MLT-X 841 - 145 PS+		X	X
MLT-X 845-120		X	X
MLT-X 845-120 H		X	X
MLT-X 961-145 V+ L		X	X
MLT-X 961-160 V+ L		X	X
MLT-X 1040-140 PS+ L		X	X
MLT-X 1041-145 PS+L		X	X

TABLE SYMBOL

	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes