

Technical sheet :

MIXED BALE CLAMP




Benefits







- Versatile: 2 in 1 attachment.
- Handles rectangular and round bales as well as wrapped bales.
- Easy to use: from one attachment to another in less than 3 minutes.
- Handles up to 2 bales.
- Innovative: easy hitching system (no tools, no dismantling).


Technical characteristics

- 2 x 3 teeth.
- Switch from a synchronized to an unsynchronized closure.
- Very good lifting capacity up to 800 kg.
- Handles round wrapped bales: Ø from 1 m to 1.60 m.
- Handles round bales with Ø from 0.9 m to 1.80 m.
- Handles 2 rectangular bales: 1.2 m high each.

Capacities		MBC 2x3
Capacity (kg)		800
Weight and dimensions		
Fork spread (mm)	b5	375
Overall height (mm)	h17	1084
Width (mm)		1196
Length (mm)		1454
Overall weight (kg)		290
Working Parameters		
Machine Equipement		
Teeth / Fingers		2 / 3
Opening minimum (mm)		420
Opening maximum (mm)		1570

Machines compatibility		MBC 2x3
Reference number		790506
MLA-T 533-145 V+ - ST5		X
MLT 625-75 H		X
MLT 630-105 ST4		X
MLT 630-105 V CP ST4		X
MLT 630-105 V ST4		X
MLT 630-115		X
MLT 630-115 V		X
MLT 630-115 V CP		X
MLT 635-130 PS+		X
MLT 635-140 V+		X
MLT 730-115 V		X
MLT 730-115 V CP		X
MLT 730-115 V CP ST4		X
MLT 733-115 ST4		X
MLT 737-130 PS+ ST4		X
MLT 840-145 PS+		X
MLT 841-145 PS+		X
MLT 845-100 H		X
MLT 845-120		X
MLT 961-145 V+ L		X
MLT 961-160 V+ L		X
MLT 1040-145 PS+ L		X
MLT 1041-145 PS+L		X
MLFX 625-75 H		X
MLFX 732		X
MLFX 735 T LSU		X
MLFX 840-140 PS+		X
MLFX 841 - 145 PS+		X
MLFX 845-120		X
MLFX 845-120 H		X
MLFX 961-145 V+ L		X
MLFX 961-160 V+ L		X
MLFX 1040-140 PS+ L		X
MLFX 1041-145 PS+L		X

TABLE SYMBOL					
	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition

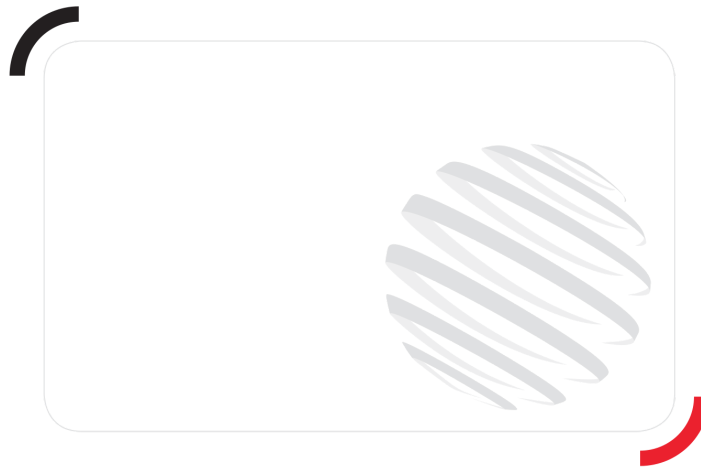

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes