

Technical sheet :

SWEeper 2 IN 1




Benefits

- Simple & efficient solution for all light and medium duty applications.
- Dust collector & front wheel standard.
- 2 in 1: sweeper-collector & side-pushing sweeper.
- Fast, toolless switching from one configuration to the other.

Technical characteristics

- Protected hydraulic system, no hydraulic backline required.
- Synchronisation valve: sweep and control the dirt tank with 1 single hydraulic function.
- Galvanized structure for more longevity.
- Synthetic brush ø520 mm.
- Optional side brush ø320 mm.
- Standard version: standard wheel, mechanical swivel.
- "+" version: reinforced wheels, mechanical swivel.
- "HWA +" version: reinforced wheels, hydraulic swivel, water sprayer (120 L).
- MLA, MRT limitation : External temperature < 33°C | usage < 2 hours a day.

Sweeper 2 in 1 - Dimensional drawing

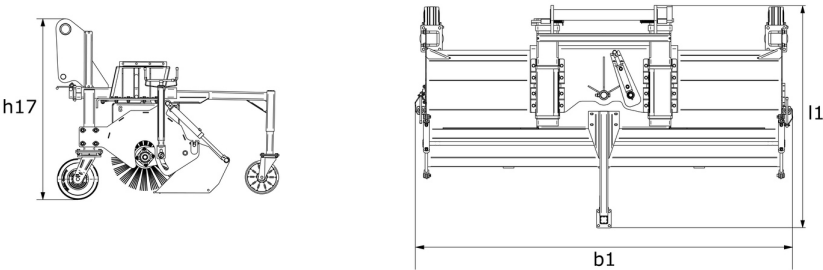

Capacities		SCC 2050	SCC 2050 +	SCC 2050 HWA +	SCC 2600	SCC 2600 +	SCC 2600 HWA +
Heaped Capacity (l)		200	200	200	250	250	250
Weight and dimensions							
Overall height (mm)	h17	950	950	1550	950	950	1550
Width (mm)		2270	2270	2270	2820	2820	2820
Length (mm)		2140	2170	2170	2140	2170	2170
Overall weight (kg)		630	640	690	755	730	800
Working Parameters							
Machine Equipment							
Water sprayer and hydraulic swivel		No	No	Yes	No	No	Yes
Rotation 1		30	30	30	30	30	30

Machines compatibility	SCC 2050	SCC 2050 +	SCC 2050 HWA +	SCC 2600	SCC 2600 +	SCC 2600 HWA +
Reference number	52000514	52000516	52000518	52000515	52000517	52000519
MLA-T 533-145 V+ - ST5	-	X	-	X	X	X
MLT 420-60 H	X	X	X	-	-	-
MLT 625-75 H	X	X	X	-	-	-
MLT 630-105 ST4	-	-	-	X	X	X
MLT 630-105 V CP ST4	-	-	-	X	X	X
MLT 630-105 V ST4	-	-	-	X	X	X
MLT 635-130 PS+	-	-	-	X	X	X
MLT 635-140 V+	-	-	-	X	X	X
MLT 730-115 V CP ST4	-	-	-	X	X	X
MLT 733-115 ST4	-	-	-	X	X	X
MLT 737-130 PS+ ST4	-	-	-	X	X	X
MLT 840-145 PS+	-	-	-	X	X	X
MLT 841-145 PS+	-	-	-	X	X	X
MLT 940-140 V+	-	-	-	X	X	-
MLT 961-145 V+ L	-	-	-	X	-	X
MLT 961-160 V+ L	-	-	-	X	-	X
MLT 1040-145 PS+ L	-	-	-	X	X	X
MLT 1041-145 PS+L	-	-	-	X	X	X
MLT-X 625-75 H	X	X	X	-	-	-
MLT-X 732	-	-	-	X	X	X
MLT-X 735 T LSU	-	-	-	X	X	X
MLT-X 840-140 PS+	-	-	-	X	X	X
MLT-X 841 - 145 PS+	-	-	-	X	X	X
MLT-X 961-145 V+ L	-	-	-	X	-	X
MLT-X 961-160 V+ L	-	-	-	X	-	X
MLT-X 1040-140 PS+ L	-	-	-	X	X	X
MLT-X 1041-145 PS+L	-	-	-	X	X	X
MT 420 H	X	X	X	-	-	-
MT 625 HA	X	X	X	-	-	-
MT 733 Easy	-	X	X	X	X	-
MT 933 Easy	-	-	-	X	X	X
MT 1033 easy	-	-	-	X	X	X
MT 1135	X	X	X	X	X	X
MT 1135 H easy ST5	X	-	X	X	X	X
MT 1335	X	X	X	X	X	X
MT-X 625 H	X	X	X	-	-	-
MT-X 733	-	-	-	X	X	X
MT-X 1033	-	X	X	X	X	X
reference_number_ereco	-	-	-	-	-	-
MHT 790	-	-	-	-	X	-
MHT 790 ST5	-	-	-	-	X	-
MHT-X 790	-	-	-	-	X	-
MHT-X 790 ST3A	-	-	-	-	X	-
MRT 1440 Easy T4 S2 400°	-	-	-	-	X	-
MRT 1640 Easy T4 S2 360°	-	-	-	-	X	-
MRT 1640 Easy T4 S2 400°	-	-	-	-	X	-
MRT 1645 115	-	-	-	-	X	-
MRT 1645 75	-	-	-	-	X	-
MRT 1840 Easy T4 S2 360°	-	-	-	-	X	-
MRT 1840 Easy T4 S2 400°	-	-	-	-	X	-
MRT 1845 115	-	-	-	-	X	-
MRT 1845 75	-	-	-	-	X	-
MRT 2145 115	-	-	-	-	X	-
MRT 2145 Easy T4 S2 360°	-	-	-	-	X	-
MRT 2145 Easy T4 S2 400°	-	-	-	-	X	-
MRT 2545 115	-	-	-	-	X	-
MRT 2545 Easy T4 S2 360°	-	-	-	-	X	-
MRT 2545 Easy T4 S2 400°	-	-	-	-	X	-
MRT-X 1440 Easy 400°	-	-	-	-	X	-
MRT-X 1640 Easy 360°	-	-	-	-	X	-
MRT-X 1640 Easy 400°	-	-	-	-	X	-
MRT-X 1645	-	-	-	-	X	-

Machines compatibility	SCC 2050	SCC 2050 +	SCC 2050 HWA +	SCC 2600	SCC 2600 +	SCC 2600 HWA +
MRT-X 1840 Easy 360°	-	-	-	-	X	-
MRT-X 1840 Easy 400°	-	-	-	-	X	-
MRT-X 1845	-	-	-	-	X	-
MRT-X 2145	-	-	-	-	X	-
MRT-X 2145 Easy 360°	-	-	-	-	X	-
MRT-X 2145 Easy 400°	-	-	-	-	X	-
MRT-X 2545	-	-	-	-	X	-
MRT-X 2545 Easy 360°	-	-	-	-	X	-
MRT-X 2545 Easy 400°	-	-	-	-	X	-

TABLE SYMBOL					
	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes