

Technical sheet :

SQUARE BALE FORKS



Benefits



- Efficient and economical square bale handling solution.
- Simultaneous handling of 1 or 4 square bales (height : 800 mm).
- Good bale upholding.
- FB 950/700 : load backrest included for a better stability of the load.
- Attachment adapted to road traffic.


Technical characteristics

- 700 to 1700 kg capacity.
- Holding tines (without tools) for road traffic.
- Holding upper frame, easy under roof operations.
- Upholding teeth on the top of the frame.
- 2 tines, Ø 35 mm, 950 mm working length.
- 4 tines, Ø 45 mm, 1010 mm working length.

Capacities		FB 950 / 700 LB	FB 1900 / 1700
Capacity (kg)		700	1700
Weight and dimensions			
Forks length (mm)	l	950	1010
Fork spread (mm)	b5	953	600
Overall height (mm)	h17	952	2236
Width (mm)		1127	1878
Length (mm)		1277	1341
Overall weight (kg)		86	215
Working Parameters			
Machine Equipement		✕	✕
Teeth		2	4

Machines compatibility	FB 950 / 700 LB	FB 1900 / 1700
Reference number	52595597	790699
MLA-T 533-145 V+ - ST5	-	X
MLT 420-60 H	X	-
MLT 625-75 H	-	X
MLT 630-105 ST4	-	X
MLT 630-105 V CP ST4	-	X
MLT 630-105 V ST4	-	X
MLT 630-115	-	X
MLT 630-115 V	-	X
MLT 630-115 V CP	-	X
MLT 635-130 PS+	-	X
MLT 635-140 V+	-	X
MLT 730-115 V	-	X
MLT 730-115 V CP	-	X
MLT 730-115 V CP ST4	-	X
MLT 733-115	-	X
MLT 733-115 LSU	-	X
MLT 733-115 ST4	-	X
MLT 737-130 PS+ ST4	-	X
MLT 840-145 PS+	-	X
MLT 841-145 PS+	-	X
MLT 940-140 V+	-	X
MLT 961-145 V+ L	-	X
MLT 961-160 V+ L	-	X
MLT 1040-145 PS+ L	-	X
MLT 1041-145 PS+L	-	X
MLT-X 625-75 H	-	X
MLT-X 732	-	X
MLT-X 735 T LSU	-	X
MLT-X 840-140 PS+	-	X
MLT-X 841 - 145 PS+	-	X
MLT-X 961-145 V+ L	-	X
MLT-X 961-160 V+ L	-	X
MLT-X 1040-140 PS+ L	-	X
MLT-X 1041-145 PS+L	-	X
MT-X 625 H	-	X

TABLE SYMBOL					
	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition

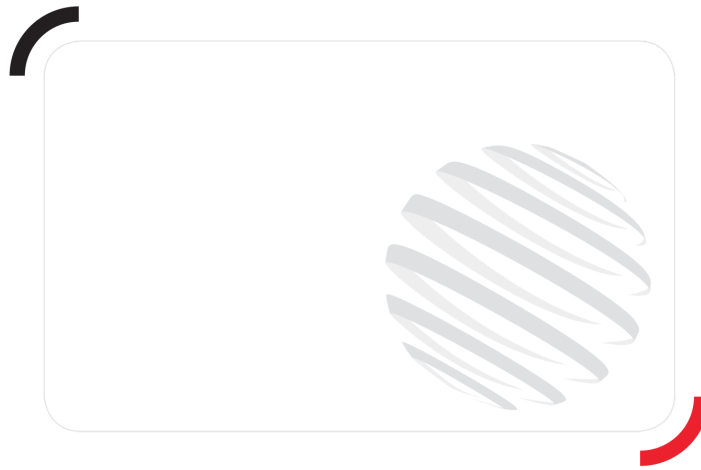

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes