

Technical sheet :

MANURE FORK WITH GRAPPLE




Benefits

- Rugged, multi-purpose attachment.
- Easy handling of compact manure.
- Total jaw opening allows working flush with walls.
- Versatile attachment that enables occasional square bale handling.
- Very good visibility, faster work.

Technical characteristics

- Massive structure and reinforced grapple for more longevity.
- Open structure.
- Very good manure holding by the grab.
- Adjustable grapple opening- more working accuracy.
- Forged tines & teeth- easy to dismantle.
- Well protected hydraulic components.

Manure Fork With Grapple - Dimensional drawing

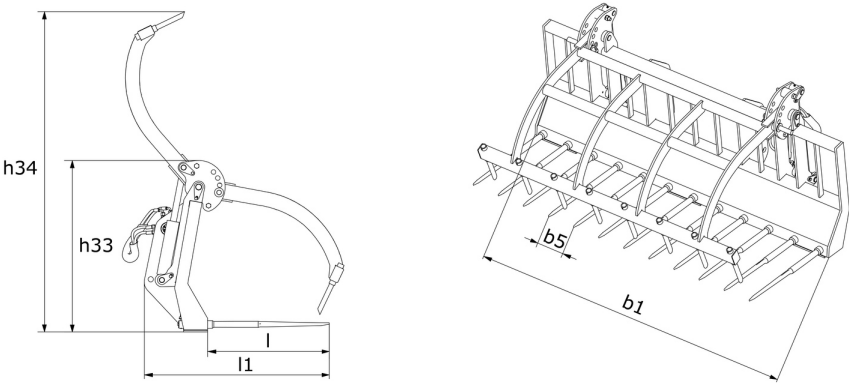

Technical characteristics		FFGR 1500 / 600	FFGR 1500 / 900	FFGR 1700	FFGR 1950	FFGR 1950 DA	FFGR 2100	FFGR 2400
Distance to center of gravity (mm)		361	370	-	-	-	-	-
Capacities								
Capacity (kg)		720	1115	-	1580	-	1700	1700
Heaped Capacity (l)		600	930	1050	1000	1200	1100	1300
Weight and dimensions								
Forks length (mm)	l	-	-	803	810	803	810	810
Fork spread (mm)	b5	225	225	225	225	225	217	205
Overall height (mm)	h17	879	1138	-	1138	-	1138	1138
Opened grab height (mm)	h34	1675	1869	2093	1625	2093	1636	1615
Closed grab height (mm)	h33	879	1138	1124	1138	1124	1138	1138
Width (mm)		1500	1500	170	1950	1950	2100	2400
Length (mm)		1328	1321	1320	1322	1320	1322	1325
Overall weight (kg)		340	437	505	477	530	492	528
Working Parameters								
Machine Equipement								
Teeth / Fingers		7 / 7	7 / 7	8 / 7	9 / 7	9 / 7	10 / 7	12 / 8

Machines compatibility	FFGR 1500 / 600	FFGR 1500 / 900	FFGR 1700	FFGR 1950	FFGR 1950 DA	FFGR 2100	FFGR 2400
Reference number	-	52595596	751429	751404	751428	751403	751405
All-Tach®	52737500	-	-	-	-	-	-
4 point Camage	52742068	-	-	-	-	-	-
Euro Camage	52742069	-	-	-	-	-	-
GCT 3-14	X	-	-	-	-	-	-
GCT 3-14 +	X	-	-	-	-	-	-
MLT 420-60 H	-	X	-	-	-	-	-
MLT 625-75 H	-	-	X	-	X	-	-
MLT 630-105 ST4	-	-	-	X	-	X	-
MLT 630-105 V CP ST4	-	-	-	X	-	X	-
MLT 630-105 V ST4	-	-	-	X	-	X	-
MLT 630-115	-	-	-	X	-	X	-
MLT 630-115 V	-	-	-	X	-	X	-
MLT 630-115 V CP	-	-	-	X	-	X	-
MLT 635-130 PS+	-	-	-	-	-	X	X
MLT 635-140 V+	-	-	-	-	-	X	X
MLT 730-115 V	-	-	-	X	-	X	-
MLT 730-115 V CP	-	-	-	X	-	X	-
MLT 730-115 V CP ST4	-	-	-	X	-	X	-
MLT 733-115 ST4	-	-	-	-	-	X	X
MLT 737-130 PS+ ST4	-	-	-	-	-	X	X
MLT 840-145 PS+	-	-	-	-	-	-	X
MLT 841-145 PS+	-	-	-	-	-	-	X
MLT 1040-145 PS+ L	-	-	-	-	-	-	X
MLT 1041-145 PS+L	-	-	-	-	-	-	X
MLT-X 625-75 H	-	-	X	-	X	-	-
MLT-X 732	-	-	-	-	-	X	X
MLT-X 735 T LSU	-	-	-	-	-	X	X
MLT-X 840-140 PS+	-	-	-	-	-	-	X
MLT-X 841 - 145 PS+	-	-	-	-	-	-	X
MLT-X 1040-140 PS+ L	-	-	-	-	-	-	X
MLT-X 1041-145 PS+L	-	-	-	-	-	-	X
ULM 412 H	X	-	-	-	-	-	-
ULM 415 H	X	-	-	-	-	-	-

TABLE SYMBOL

	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes