

Technical sheet :

# ***SILAGE FACING BUCKET***

---



## **Benefits**

- Loads and aerates silages in one operation.
- Ready-to-use silage: direct distribution or use in the mixing wagon.
- Clean silage pit face, limits secondary fermentation.
- Time-saving, a single attachment for the handling of silage and bulk feed.
- For corn silage and grass silage (short wisps).  
Not suitable for long wisp silage (10 cm max.).

## **Technical characteristics**

- Synchronized hydraulic movements.
- Hydraulic motor integrated in the rotor, perfect protection & longevity.
- Backward rotor rotation, better bucket filling 500 HB wear plate.
- Handling material with a density  $\leq 1000$  kg/m<sup>3</sup>.










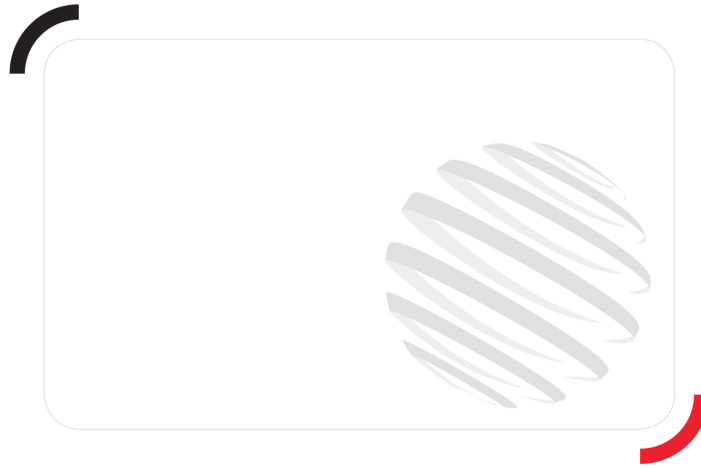
Capacities		BSCR 2100 / 1130	CRS 2350 / 1800	CRS 2550 / 2000
Heaped Capacity (l)		1130	1800	2000
Weight and dimensions				
Overall width (mm)		b1 2100	2350	2550
Overall weight (kg)		540	900	955
Working Parameters				
Machine Equipment				
Machines compatibility		BSCR 2100 / 1130	CRS 2350 / 1800	CRS 2550 / 2000
Reference number		52728902	52612542	52612540
MLT 625-75 H		X	-	-
MLT 630-105 ST4		-	X	-
MLT 630-105 V CP ST4		-	X	-
MLT 630-105 V ST4		-	X	-
MLT 630-115		-	X	-
MLT 630-115 V		-	X	-
MLT 630-115 V CP		-	X	-
MLT 635-130 PS+		-	-	X
MLT 635-140 V+		-	-	X
MLT 730-115 V		-	X	-
MLT 730-115 V CP		-	X	-
MLT 730-115 V CP ST4		-	X	-
MLT 733-115		-	-	X
MLT 733-115 LSU		-	-	X
MLT 733-115 ST4		-	-	X
MLT 737-130 PS+		-	-	X
MLT 737-130 PS+ ST4		-	-	X
MLT 840-145 PS+		-	-	X
MLT 841-145 PS+		-	-	X
MLT 940-140 V+		-	-	X
MLT 1040-145 PS+ L		-	-	X
MLT 1041-145 PS+L		-	-	X
MLTX 625-75 H		X	-	-
MLTX 732		-	-	X
MLTX 735 T LSU		-	-	X
MLTX 840-140 PS+		-	-	X
MLTX 841 - 145 PS+		-	-	X
MLTX 1040-140 PS+ L		-	-	X
MLTX 1041-145 PS+L		-	-	X

TABLE SYMBOL					
	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes